


<i>Passmaß</i>	<i>Abmaß</i>
----------------	--------------

EMPFEHLUNGSLISTE :						
QUERSCHNITTS- FLÄECHE ..MM/2						
SICHERUNG	16 A	20 A	25 A	35 A	50 A	63 A
LEITUNGSLÄENGE						
- 10 m	2.5 mm ²	2.5 mm ²	4.0 mm ²	6.0 mm ²	10.0 mm ²	16.0 mm ²
10 - 20 m	2.5 mm ²	4.0 mm ²	4.0 mm ²	6.0 mm ²	10.0 mm ²	16.0 mm ²
20 - 30 m	2.5 mm ²	4.0 mm ²	6.0 mm ²	10.0 mm ²	16.0 mm ²	16.0 mm ²

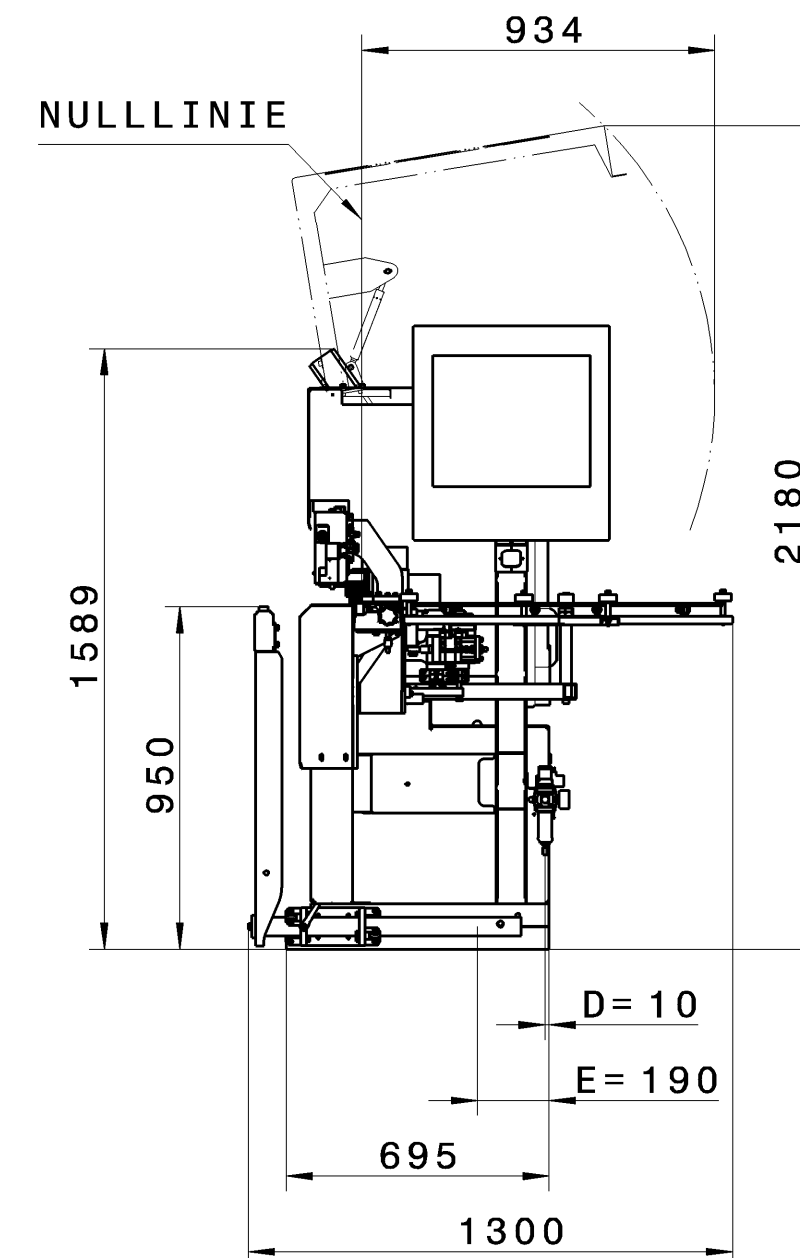

E= ELEKTROANSCHLUSS
BETRIEBSSPANNUNG
400V - 3PH - 50HZ
GESAMTANSCHLUSSWERT
16.5 KW
NENNSTROM
24 A
GEWICHT
1850KG

D= DRUCKLUFTANSCHLUSS
6BAR / $\phi 1/2"$
GESAMTABSAUGELEISTUNG
3805 M3/H

LUFTGESCHWINDIGKEIT
28M/SEC

DRUCKVERLUST * *

CA. 2000PA

LUFTVERBRAUCH
350 Nl/min

MASCHINENNUMMER: 0-261-20-5586

					M	WERKSTOFF -	 BRANDT Kantentechnik GmbH
					1:20	ROHMASS	
						MAT. -NR.	
AB	AEND.-NR.	DATUM	NAME				
BEARB.	14.02.2011		NAME	BENENNUNG			ZEICHNUNGS.-NR.
			Berthele	AUFSTELLPLAN KDF 440			5-701-80-2306
GEAEN.							
KTRL.	14.02.2011						
Copyright reserved				CATTIA A2		GEWICHT (kg)	BL. -
							BL. - Z.

